

ISS	REVISED BY:	REVISION DATE	ECO #

# NOTES:

## MATERIAL:



HEAD - DUCTILE IRON, 40 KSI YIELD (GALV PER ASTM A153)

## DIMENSIONS: INCHES

## MECHANICAL RATING:

ANCHOR RATING WORKING LOAD (RWL) BASED ON INSTALLATION IN CLASS 5 SOIL (BLOW COUNT 24-40 PER ASTM D-1586), AND MIN. INSTALL DEPTH.

ULT (LB)	RWL (LB)	SOIL BEARING AREA (IN^2)	MIN INSTALL DEPTH (IN)
10,000	4,900	9.39	42

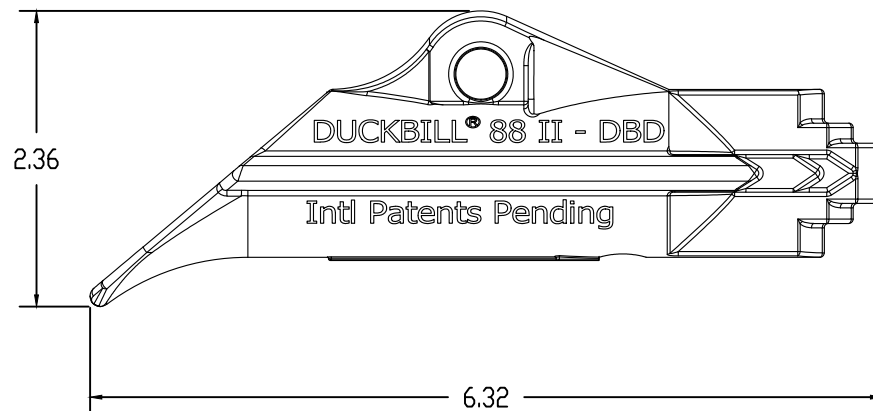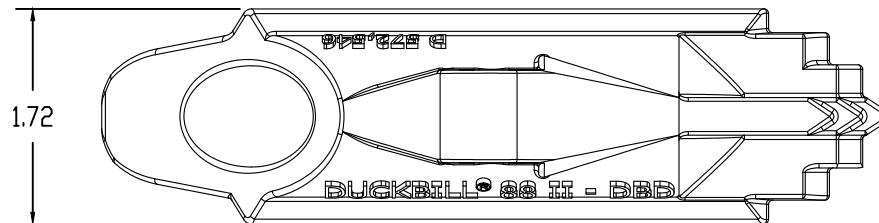

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to MacLean Power, L.L.C., Kingsley Park Five, 481 Munn Rd. Suite 300, Fort Mill, SC 29715, USA.



WWW.MACLEANPOWER.COM

CATALOG NUMBER:			10850
SHEET NAME:		Sheet1	1 OF 1
DRAWING DESCRIPTION:			
88-DBD ANCHOR HEAD DUCTILE IRON CHISEL TIP			
DRAWN BY:	DH	DATE:	05/19/21
APPROVED:	DR		