

REVISED BY: | REVISION DATE ECD #

NDTES:

MATERIAL:

HEAD & SHACKLE- DUCTILE IRON, 40 KSI YIELD RIVET PIN - CARBON STEEL

FINISH:


HOT DIP GALVANIZED PER ASTM A123

DIMENSIONS: INCHES

MECHANICAL RATING:

ULTIMATE TENSILE RATING: 40 KIPS

SDIL BEARING SURFACE AREA: 143.4 (IN^2)

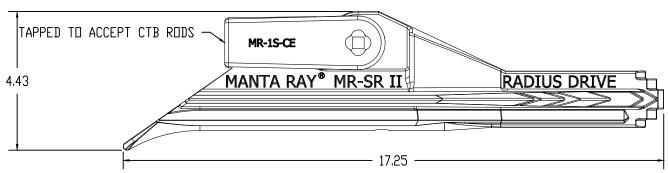

CATALOG NUMBER:

MRSRGW006L106X

SHEET NAME: Sheet1

DΕ

DRAWING DESCRIPTION:

MR-SR-CTB ANCHOR/SHACKLE **ASSEMBLY**

DR

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to "MacLean Power, L.L.C., Kingsley Park Five, 481 Munn Rd. Suite 300, Fort Mill, SC 29715, USA.

WWW.MACLEANPOWER.COM

06/22/21